

What's new?



Motion sensor unresponsive to animals **CR-23**.
Solar floodlight imitating a CCTV camera **GUARDOS**.
Glowing garden stone **MARMO**.



LED luminaires with motion sensor

TULON

- PIR motion sensor: detects movement within a radius of 9 meters, automatically turning on the light for increased safety and comfort in places such as corridors, stairwells and external entrances.
- Durability and warranty: The product can operate in temperatures from -20°C to $+40^{\circ}\text{C}$ and is covered by a 5-year warranty.
- Adjustment of motion sensor parameters: possibility to set the lighting time from 10 seconds to 5 minutes and adjustment of daylight sensitivity from 3 to 2000 lux.

LD-TULON15WOW-00



LD-TULON15WOW-10



LD-TULON15WOK-00



LD-TULON15WOK-10



Folder	W	Light	Weight	Barcode
LD-TULON15WOW-00	15 W	1350 lm	280 g	5902801496851
LD-TULON15WOW-10				5902801496875
LD-TULON15WOK-00			420 g	5902801496899
LD-TULON15WOK-10				5902801496912





LED floodlight

NELI

- The product comes with a 3-year warranty.
- The floodlight is equipped with a 1.5-meter cable ending with a plug.
- The tilt adjustment function allows the user to optimally direct the light beam where it is most needed.

LD-NELI30WP-64



LD-NELI50WP-64



				
LD-NELI30WP-64	30 W	2700 lm	670 g	5902801467431
LD-NELI50WP-64	50 W	4500 lm	780 g	5902801467479





LED facade luminaire **NICEA**






- The luminaire is characterized by a modern, minimalist design, perfectly matching both modern and classic architectural designs.
- It illuminates its entire front surface, which ensures uniform, neutral lighting (4000 K) with a high luminous flux (1900 lm).
- It has a built-in motion sensor with a range of up to 9 meters and an angle of 140 degrees, allowing you to adjust the lighting time and sensor sensitivity.

LD-NIC20W-DIM-40



LD-NIC20W-DIM-00



				
LD-NIC20W-DIM-40	20 W	1900 lm	350 g	5902801496936
LD-NIC20W-DIM-00				5902801496950









Garden lamp

MARMO STONE

- Gaining popularity in home gardens and green spaces of hotels and restaurants.
- The fixture is perfect for lawns, creating soft, pleasant lighting that encourages spending time outdoors.
- The polycarbonate lampshade imitating solid stone houses two E27 sockets, recommended for bulbs up to 20 W. The lamp has an integrated 2.5-meter power cord.

OS-MARMOX60-00



			
OS-MARMOX60-00	max. 20W	3400 g	5902801438653





Solar floodlight **GUARDOS**

- The GUARDOS Solar Floodlight is a device that combines lighting with a deterrent function, increasing the sense of security without the need to install traditional monitoring.
- A motion sensor with a range of up to 5 meters activates the lighting only when motion is detected and has a red diode imitating recording.
- The 1200 mAh lithium-ion battery provides up to 6-8 hours of operation on a full charge.

LD-GUARDOS-300-64



LD-GUARDOS-300-64	300 lm	1200 mAh	500 g	5902801467561



Solar floodlight **DAVOS**







- Integrated motion and twilight sensors.
- Possibility of directly connecting the luminaire to the panel or installing the panel in a sunnier place using the included 180 cm long cable.
- The luminaire is equipped with a PIR motion sensor that detects movement within a radius of up to 6 meters.


LD-DAVOS-1000-00



LD-DAVOS-1000-10



					
LD-DAVOS-1000-00	5,5 V/2,7 W	1000 lm	2000 mAh	530 g	5902801467547
LD-DAVOS-1000-10					5902801467516

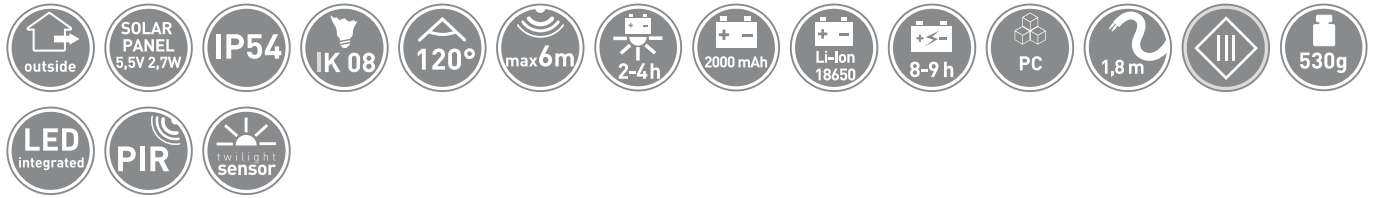



Solar floodlights **LUMOS II**








- Up to eight hours of continuous operation when the battery is fully charged;
- During periods of low sunlight, the batteries can be charged in an external charger;
- Motion sensor range is 6 meters;
- 3-year warranty.

LD-LUMOSII-2000-64



LD-LUMOSII-3000-64



						
LD-LUMOSII-2000-64	5,5 V/2 W	2000 lm	2600 mAh	420 g	3-6 h	5902801467950
LD-LUMOSII-3000-64	9 V/3 W	3000 lm	2 × 2600 mAh	770 g	4-8 h	5902801467974










PIR Motion Sensor **CR-23**

- Does not detect small pets: Special technology prevents the detection of small pets, which helps avoid unnecessary switching on of the light.
- Dual-plane motion detection: The device is equipped with two detectors that must simultaneously register movement to activate the light, thus ensuring higher detection precision.
- Detection range: Effectively detects movement within a radius of up to 12 meters from the device, which allows for optimal coverage of the area around the house or inside it.

CR-CR23000-00



	 LED max	 max		
CR-CR23000-00	600 W	1200 W	160 g	5902801497032

- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 





PIR Motion sensor

















CR-22

- **Wide Detection Angle:** The CR-22 motion sensor offers a 360-degree detection range with a range of up to 8 meters, ideal for monitoring large spaces.
- **Mounting Height:** The recommended mounting height is between 1.8 and 2.5 meters for optimal performance.
- **Mounting Hole:** The hole where the sensor will be mounted should be between 63 and 66 mm in diameter.
- 5 year warranty.

CR-CR22000-00



	 LED max	 max		
CR-CR22000-00	600 W	1200 W	65 g	5902801497018

-  220-240 V
50-60 Hz
- 
-  IP20
-  inside
-  -20°C
+40°C
- 
-  OUTPUT
LED
1200 W
MAX
-  OUTPUT
LED
600 W
MAX
-  360°
-  Ø8 m
-  1,8-2,5 m
-  2,5 mm²
-  PLASTIC
-  65 g
-  3-2000
LUX
-  10s-7min
Time delay






















Motion sensor **CR-21**



- Detection range and angle: Motion detection up to 30 meters with a 360-degree detection angle, providing full coverage of the selected area.
- Adjustable settings: Ability to adjust detection sensitivity, daylight sensor and lighting hold time.
- 5 year warranty.

CR-CR21000-00



	 LED max	 max		
CR-CR21000-00	1000 W	2000 W	190 g	5902801496998

-  220-240 V
50-60 Hz
- 
-  IP20
-  inside
-  -20°C
+40°C
- 
-  OUTPUT
2000 W
MAX
-  OUTPUT
LED
1000 W
MAX
-  360°
-  Ø30 m
-  2,2-4 m
-  connection
-  PLASTIC
-  190g
-  3-2000
LUX
-  10s-7min
Time delay

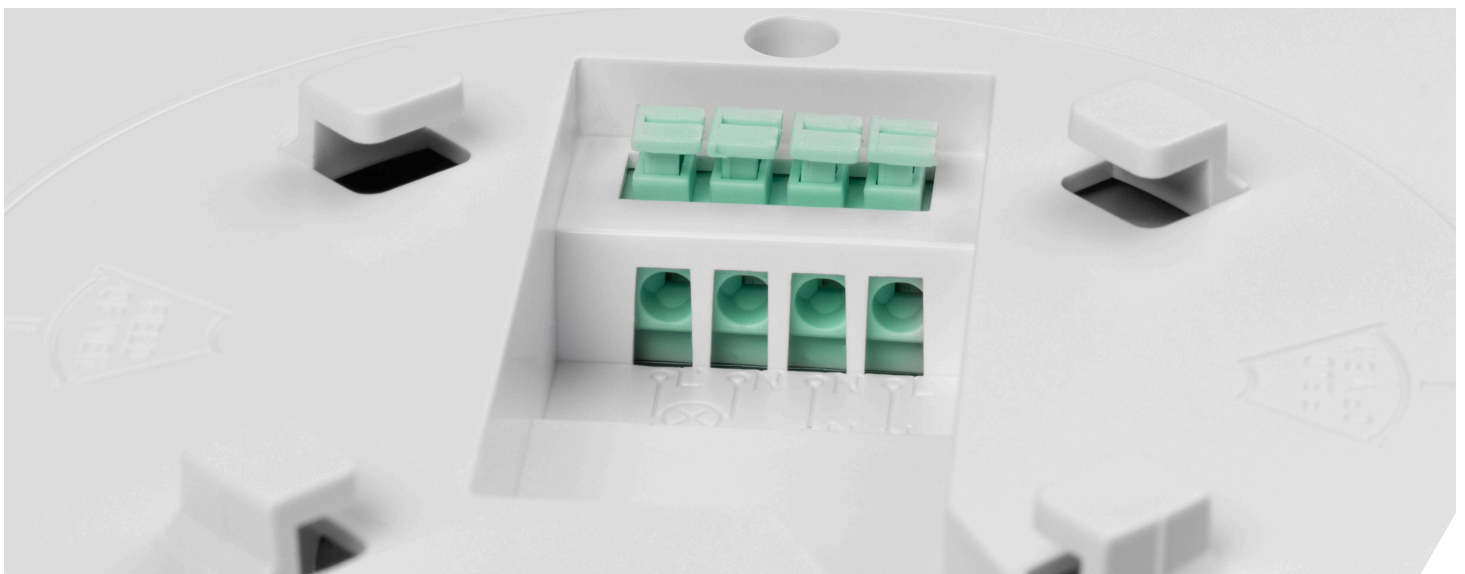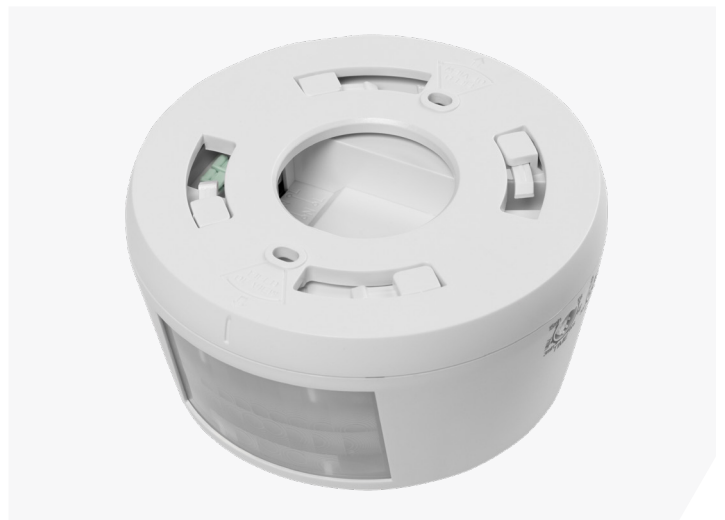
























PIR Motion sensor **CR-20**

- The CR-20 motion sensor is designed for wall mounting in standard junction boxes.
- The sensor detects movement within a range of up to 10 meters, and the detection angle is 120 degrees, which ensures effective coverage of the monitored area.
- The sensor has the ability to adjust the detection sensitivity, daylight sensor and light retention time, so the user can adapt the device to individual needs.
- 5 year warranty.

CR-CR20000-00



	 LED max	 max		
CR-CR20000-00	200 W	500 W	100 g	5902801496974

-  220-240 V
50-60 Hz
- 
-  IP20
-  inside
-  -20°C
+40°C
- 
-  OUTPUT
500 W
MAX
-  OUTPUT
LED
200 W
MAX
-  120°
-  Ø10 m
-  1-1,8 m
-  2,5 mm
-  PLASTIC
-  100g
-  3-2000
LUX
-  + -
SENS
-  10s-7min
Time delay






























Motion and presence sensor **CO-3**

- Micro-movement detection: the sensor is able to detect even the smallest movements, such as typing on a keyboard.
- Detection range: depending on the mounting location, the sensor offers different detection ranges: up to 12 m when wall-mounted and up to 24 m when ceiling-mounted, with an additional specialization in detecting presence within a radius of 6 m.
- Multifunctional head: thanks to the movable head, the sensor can be mounted both on the wall and on the ceiling, which allows for optimizing the range and efficiency of operation.
- 5 year warranty.

CR-CO3000-00



	 LED max 	 max 		
CR-CO3000-00	600 W	1200 W	210 g	5902801497056

-  220-240 V
50-60 Hz
- 
-  IP65
-  inside
outside
-  -20°C
+40°C
- 
-  LED
interact
-  OUTPUT
LED
1200 W
MAX
-  OUTPUT
LED
600 W
MAX
-  360°
-  Ø24 m
-  1,8-2,5 m
-  2,5 mm²
-  PLASTIC
-  210g
-  0,1-∞
LUX
-  + -
SENS
-  10s-15min
Time delay



LED park lamp
GALI



LED high bay
ATLANTA



LED bulkhead fixture
KODO



LED downlight luminaire
MAXIS CCT



LED ceiling lamp
KIOTO

